



Features

- Fast impulse breakdown
- Tight DC breakdown voltage tolerance ($\pm 10\%$)
- Rugged ceramic-metal construction
- Low capacitance

Applications

- Test equipment
- Medical electronics
- Instrumentation circuits
- TWT drive circuitry
- Avionics

Description

High Energy Devices' PMT(301) Series surge protectors (350-3500V) provide a high level of protection from high-speed, high-current transient surges. These devices are constructed using a proprietary semiconductor junction process, which results in nanosecond response times combined with peak current ratings in excess of 20kA.

Ordering Information

A complete part number is represented by the digits below. Breakdown voltages are expressed in Volts for devices $< 1000V$ and kV for devices $\geq 1kV$. For example, PMT(301)350 is a 350V PMT(301) series device and PMT(301)1.0 is a 1kV PMT(301) series device.

Standard Voltages

Series	DC Breakdown Voltage (Nom)	Unit
PMT(301)	350	V
	400	V
	500	V
	550	V
	600	V
	800	V
	1.0	kV
	1.5	kV
	2.0	kV
	2.5	kV
	3.0	kV
	3.5	kV

Devices in the PMT(301) Series with other breakdown voltages in the 350-3500V range are available upon request.

Product Series / Part Number	Breakdown Voltage
PMT(301)XXX	350-800V
PMT(301)X.X	1.0-3.5KV

Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)350			PMT(301)400			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	315	350	385	360	400	440	V
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	1150	-	-	1200	V
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	6,000	-	-	6,500	-	-	surges

Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)500			PMT(301)550			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	450	500	550	495	550	605	V
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	1300	-	-	1350	V
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	7,800	-	-	8,500	-	-	surges

Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)600			PMT(301)800			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	540	600	660	720	800	880	V
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	1400	-	-	1600	V
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	9,300	-	-	16,600	-	-	surges

Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)1.0			PMT(301)1.5			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	0.9	1.0	1.1	1.35	1.50	1.65	kV
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	1.8	-	-	2.3	kV
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	29,300	-	-	53,700	-	-	surges


Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)2.0			PMT(301)2.5			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	1.8	2.0	2.2	2.25	2.50	2.75	kV
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	2.55	-	-	3.19	kV
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	68,100	-	-	68,100	-	-	surges

Specifications (@25°C)

Parameter	Conditions	Symbol	PMT(301)3.0			PMT(301)3.5			Units
			Min	Nom	Max	Min	Nom	Max	
Device Specifications									
DC Breakdown	100V/s	V_{BD}	2.7	3.0	3.3	3.15	3.50	3.85	kV
Impulse Breakdown	80kV/ μ s	V_{bd}	-	-	3.83	-	-	4.47	kV
Insulation Resistance	100V	IR	-	10^{10}	-	-	10^{10}	-	Ω
Capacitance	1MHz	C	-	-	2.0	-	-	2.0	pF
Life Ratings									
Surge Life	100A (PW=20 μ s)	-	68,100	-	-	68,100	-	-	surges

MECHANICAL DIMENSIONS mm/(inches)

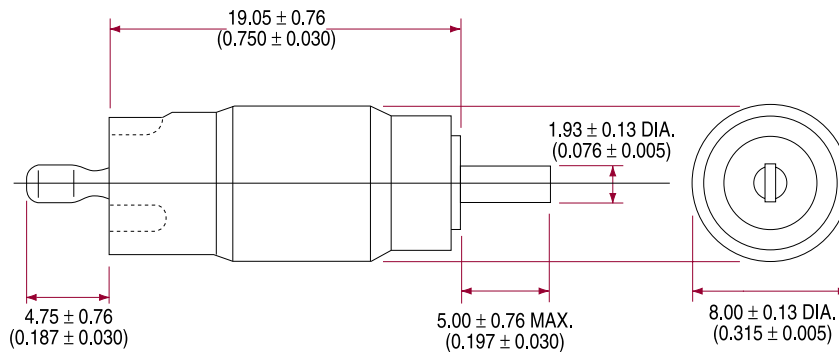

Contact Information:

High Energy Devices, LLC
26 Hollenberg Court
Bridgeton, MO 63044
Phone: 314.291.0030
Fax: 314.291.8184
E-mail: info@highenergydevices.com
www.highenergydevices.com

HIGH ENERGY DEVICES, LLC MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NEITHER CIRCUIT PATENT LICENSES NOR INDEMNITY ARE EXPRESSED OR IMPLIED. EXCEPT AS SET FORTH IN HIGH ENERGY DEVICES' STANDARD TERMS AND CONDITIONS OF SALE, HIGH ENERGY DEVICES, LLC ASSUMES NO LIABILITY WHATSOEVER, AND DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT.

THE PRODUCTS DESCRIBED IN THIS DOCUMENT ARE NOT DESIGNED, INTENDED, AUTHORIZED OR WARRANTED FOR USE AS COMPONENTS IN SYSTEMS INTENDED FOR SURGICAL IMPLANT INTO THE BODY, OR IN OTHER APPLICATIONS INTENDED TO SUPPORT OR SUSTAIN LIFE, OR WHERE MALFUNCTION OF HIGH ENERGY DEVICES' PRODUCT MAY RESULT IN DIRECT PHYSICAL HARM, INJURY, OR DEATH TO A PERSON OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. HIGH ENERGY DEVICES, LLC RESERVES THE RIGHT TO DISCONTINUE OR MAKE CHANGES TO ITS PRODUCTS AT ANY TIME WITHOUT NOTICE.

Specification: PMT(301) Series
©Copyright 2002, High Energy Devices, LLC
All rights reserved. Printed in USA
March 2008.